


# Mesa





TEXTSTYLE

Commercial Light Filtering | Blackout

## Light Filtering

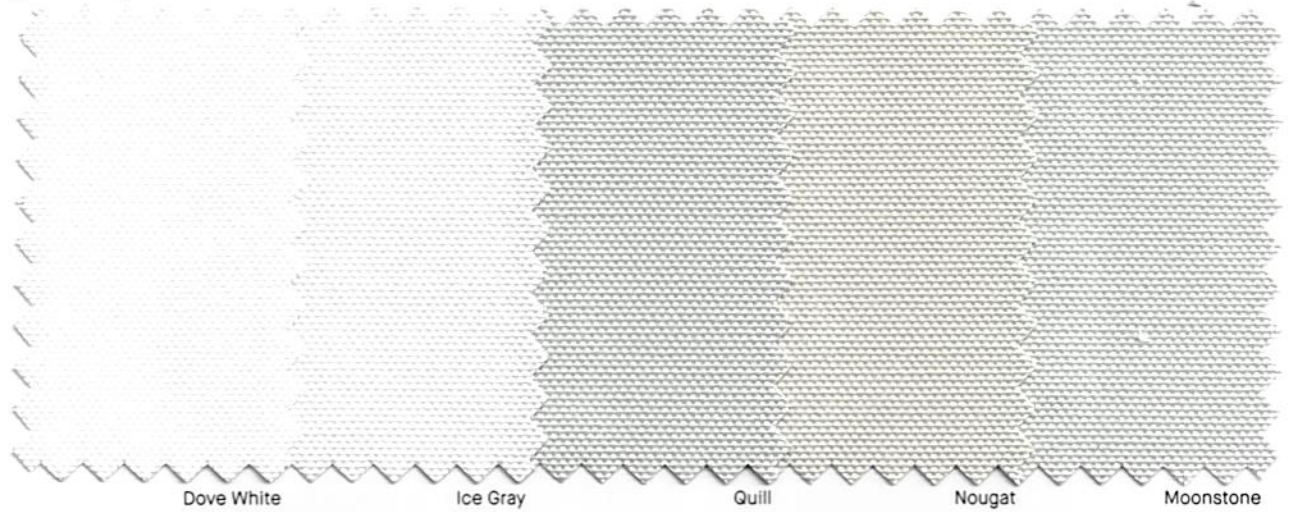

## Blackout

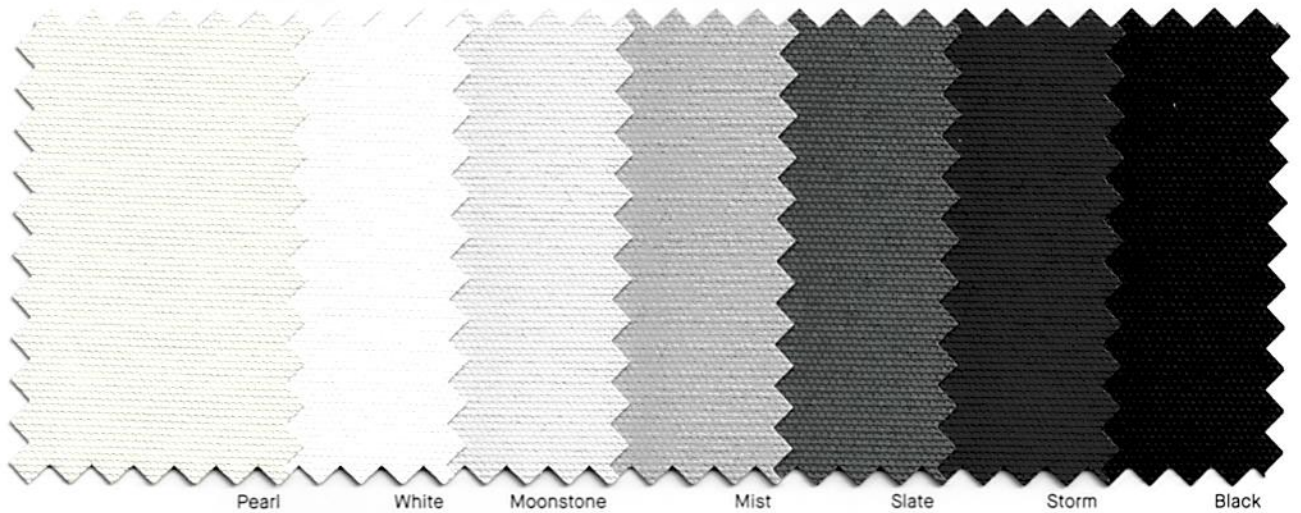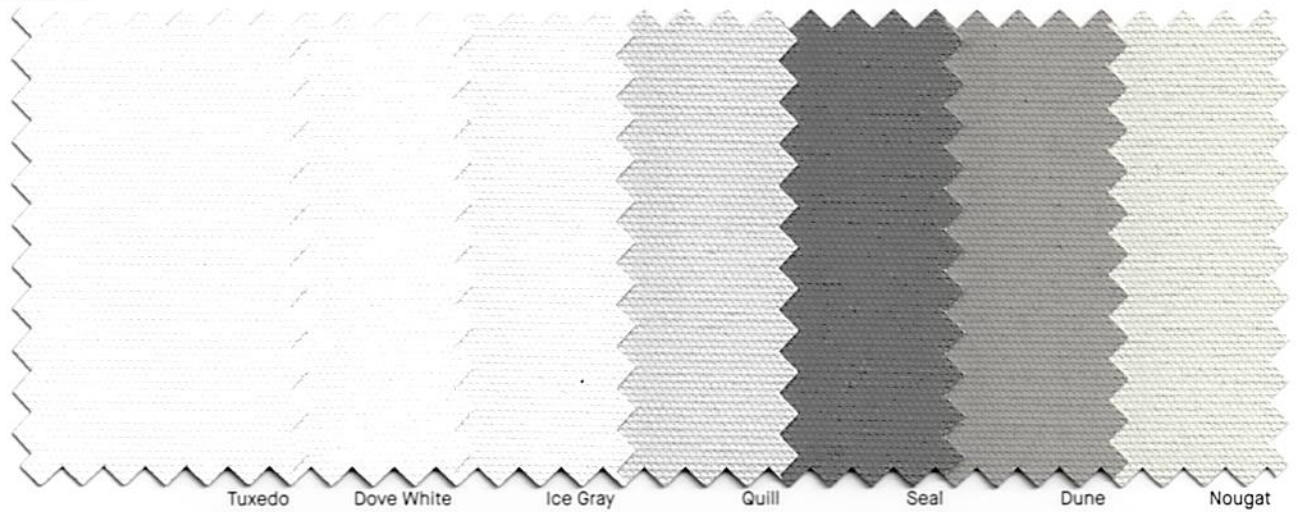



## SPECIFICATIONS

	Light Filtering	Blackout
Composition	100% Polyester	100% Polyester with Acrylic Foam Backing
Weight	6.93oz/yd <sup>2</sup> (235g/m <sup>2</sup> )	12.68 oz/yd <sup>2</sup> (430 g/m <sup>2</sup> )
Thickness	0.019in (.48mm)	0.022in (.55mm)
Colorfastness	Grade 8	
Average length	27yd/roll (25m)	
Width	118" (3m)	
Cutting	Cold, Crush, Ultrasonic	
Welding	Tape Recommended. 330-360°F. Test welding parameters in advance.	
Railroadable	No	
Cleaning	Wipe clean with warm soapy water and damp cloth.	
Environmental Standards	Greenguard Gold or Low VOC < 0.5mg/m <sup>3</sup> : CDPH Standard Method v1.1-2010, Health Product Declaration, Oeko-Tex Standard 100	
Fire Classifications	NFPA 701, CA Title 19	



LOW VOC



HEALTH PRODUCT  
DECLARATION



www.oeko-tex.com/standard100



9001



10 YEAR  
WARRANTY



FR



PVC FREE



LEAD FREE



FORMALDEHYDE  
FREE



PHthalate  
FREE



FRAGRANCE  
FREE



ENERGY  
SAVING



PRINTABLE

For complete technical information, current test results, performance specifications, or larger samples, please contact customer service.

A DIVISION OF  
**ROLLEASE  
ACMEDA**  
©2020 Textstyle

