


SCALA / SCALA FR

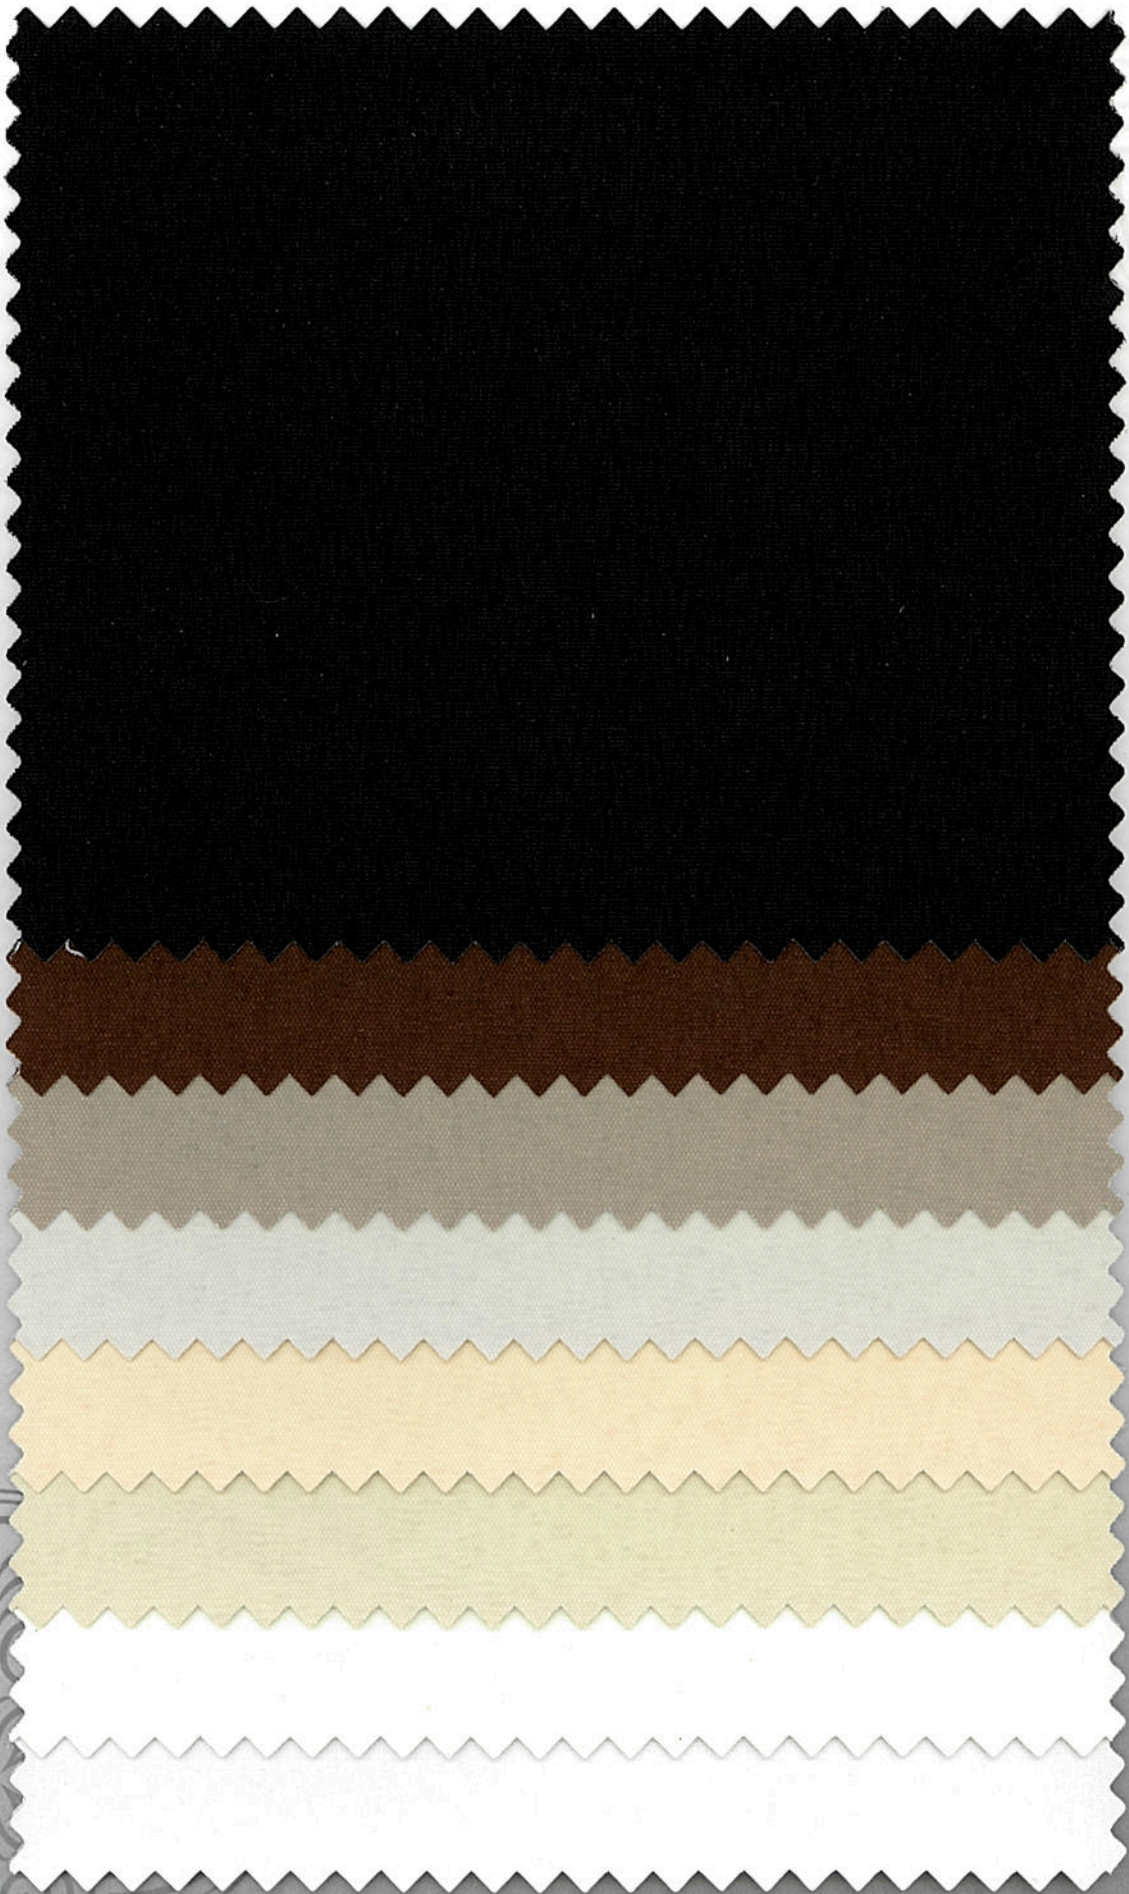

Black
96-E0177
not available as FR

Nut Brown
96-E0013
(FR) 99-E0013

Mocha Mousse
96-E0156
(FR) 99-E0156

Dolphin Fin
96-E0157
(FR) 99-E0157

Mississippi
96-E0155
(FR) 99-E0155

Linen
96-E0165
(FR) 99-E0004

Coconut
96-E0154
(FR) 99-E0154

White
96-E0163
(FR) 99-E0001

SCALA / SCALA FR



FABRIC *specifications*

Openness Factor*	0%
Material Content	47% Polyester, 53% Acrylic, PVC Free
Fabric Width	118"
Approx. Roll Length	43 yards
Weight	386 g/sm (+/- 5%); 11.4 oz/syd
Thickness	0.47 mm (+/- 5%)
Available Applications	Roller Shades

FENESTRATION PROPERTIES

Number	Description	Ts	Rs	As	Tuv	Tv	Sc		
							1/8" Cl	1/4" Cl	1/4" H.A.
96-E0163	White	0	70	30	0	0	0.26	0.27	0.28

Similar fenestration data achieved for all other colors.

*Please note that the Openness Factor is an approximation and may vary from color to color in the same fabric due to the color and manufacturing process.

The solar transmittance (Ts), solar reflectance (Rs), solar absorptance (As), ultra-violet transmittance (Tv) and Openness-Factor (O-F) were determined for the fabric alone. The Shading Coefficients (Sc) were determined for the fabric used with a single light of 1/8" double strength glass, a 1/4" clear plate and a 1/4" heat absorbing (H.A.) plate. The Shading Coefficients are for the fabric hung internally unless otherwise indicated. The test data and calculated results are presented in the above tables. The Ts, Rs, As, Tuv, and Tv are expressed as percentages.

Fire Classification*

NFPA 701 1-2010 Edition

*(Available for White, Coconut, Linen, Mississippi, Dolphin Fin, Mocha Mousse, Nut Brown. Black is not available as FR.)

Environmental Benefits

GREENGUARD® Certified



Routine Cleaning

Regular light dusting with a feather duster is suggested. A hand-held vacuum with low suction may also be used. When vacuuming, avoid pulling or stretching the fabric. Rigorous vacuuming is not recommended since this could distort the fabric. Alternatively, dirt and debris can be blown away using compressed air or a hand-held hair dryer on the cool setting. Spots can be cleaned by gently blotting with a soft, damp cloth or sponge, using lukewarm water and a mild detergent. Be careful not to apply too much pressure to the fabric. Let area air dry.

Fabrication Recommendations

Can be cut with a cold blade, UltraSonic cutting recommended.